



10 / 529394
1/002003/004130
28 MAR 2005

INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 29 DEC 2003
WIPO PCT


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the application is now proceeding in the name as identified herein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

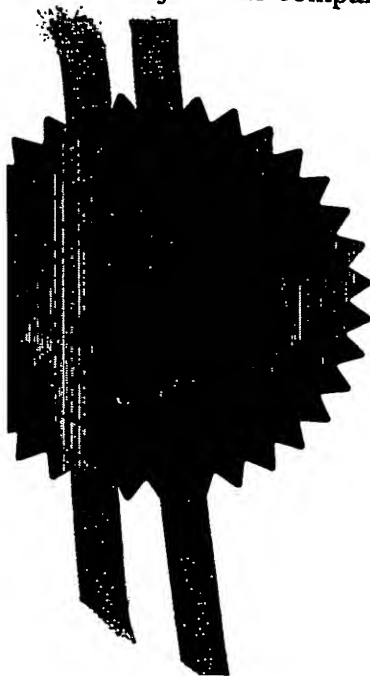

Signed *W. Evans*

Dated 28 November 2003



INVESTOR IN PEOPLE

GB0222436.8

By virtue of a direction under Section 32 of the patents Act 1977, the application is proceeding in the name of,

SPLASHPOWER LIMITED,
Incorporated in the United Kingdom,
St John's Innovation Centre,
Cowley Road,
CAMBRIDGE,
CB4 0WS,
United Kingdom


[ADP No. 08522310001]

Patents Form 1/77

Patents Act 1977
(Rule 16)The
Patent
Office

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)



The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

CTV/P100964GB

2. Patent application number
(The Patent Office will fill in this part)

0222436.8

27SEP02 E751482-1 002973
P01/7700 0.00-0222436.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Zap Wireless Technologies Limited
Downing Park Innovation Centre
Swanwick
Cambridge
CB5 0NB

SECTION 30(1) ACT 1977

APPLICATION FILED

27 SEP 2002

06.01.03

Patent's ADP number (if you know it)

8275349002

If the applicant is a corporate body, give the country/state of its incorporation

UK

4. Title of the invention

Improvements relating to retention of rechargeable devices

5. Name of your agent (if you have one)

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Belgrave Hall
Belgrave Street
Leeds
LS2 8DD

Patent's ADP number (if you know it)

14574001 7631310002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if)

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Yes

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 0
 Description 10
 Claim(s) 0
 Abstract 0
 Drawing(s) 3 *only*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify) 1

Cover letter ✓

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

27/9/2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Chris Vaughan

0113 233 0100

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

DUPLICATE

IMPROVEMENTS RELATING TO RETENTION OF RECHARGEABLE
DEVICES

5 This invention relates to a new system for temporary attachment of portable rechargeable devices to recharging stations, and a method of temporarily attaching portable rechargeable devices to their charging units.

10 Today's portable rechargeable devices are typically recharged by temporarily connecting them to a recharger via a mating plug-in or clip-on connection. An example is the typical "floating wire" connection between a mains charger and a mobile phone (see Figure 1).

The connection serves two purposes:

- 1) It electrically connects the device to its recharger, allowing transfer of power.
- 15 2) It mechanically connects the device to its recharger, in a way which retains it securely against forces from accidental knocks and the like, but is easily removable by the user. This mechanical connection thus allows recharging to continue reliably until the user physically breaks the connection, and in some cases may also keep the device conveniently available to the user. Examples of
20 the latter include the recharging "cradle" for the Palm Pilot® and the drop-in "hands-free" car socket for a mobile phone.

25 Some of today's portable rechargeable devices are charged by a non-contact means, for example by inductive power transfer. An example is the Braun® electric toothbrush, where the toothbrush must be accurately located onto a spigot on the recharger, which retains it. However, the spigot serves only as a positioning means and no additional force is required to separate the toothbrush from the charger other than that required to lift the toothbrush against gravity.

30 But some of these non-contact charging means do not require the device and the recharger to be so precisely aligned. Such solutions may offer significant freedoms for the designer and for the user. For example the recharging means may be a

laminar surface upon which a device can conveniently be placed, in any position and any orientation, as disclosed, for example, in the present applicant's UK patent application no. 01283175 of 27 November 2001. This avoids the limitations of the positive mechanical connection (e.g. cradles, connectors, clips) required by other charging solutions, and so is more convenient to the user because it is easier to place a device casually anywhere on a surface than precisely to align it with a mechanical socket. Dispensing with the need for mechanical location may also allow other benefits, such as the ability simultaneously to recharge multiple units, and/or to recharge devices of different types on the same recharger.

10

However in some situations, the lack of positive mechanical retention of such a surface may be a disadvantage for users. For example:

- A flat recharging surface must be kept substantially horizontal to prevent devices from sliding off the surface. But this requirement may be inconvenient to the user – for example putting the surface on a desk may occupy otherwise-useful space. Freeing-up the surface so that it can be placed in any orientation would give the user much more flexibility to use otherwise-useless space – for example to mount the surface vertically on a wall, or even on the inside of a car roof.
- If a mobile recharging surface is likely to be subject to movement (e.g. a tabletop that may get knocked, or in a car, aeroplane or spacecraft), the devices may fall off.

20

Clearly, it would be convenient to remove these potential disadvantages whilst preserving the benefits of freedom of design and use of such surface-based charging systems.

25

According to a first aspect of the present invention there is provided a system for wireless powering or recharging of rechargeable devices, the system comprising a charging unit and a power receiving device, wherein one or other or both of the

30

adapted for temporary releasable connection of the power receiving device to the charging unit.

5 According to a second aspect of the invention, there is provided a system for wireless powering or recharging of rechargeable devices, the system comprising a charging unit and a power receiving device, wherein one or other or both of the charging unit and the power receiving device is provided with connecting means adapted for temporary releasable connection of the power receiving device to the charging unit in at least two positions and/or rotations of the device relative to the charging unit.

10

According to a third aspect of the invention, there is provided a charging unit adapted for wireless powering or recharging of a power receiving device, wherein the charging unit is provided with connecting means for temporary releasable connection of a power receiving device thereto.

15

According to a fourth aspect of the present invention, there is provided a power receiving device adapted for wireless powering or recharging by a charging unit, wherein the power receiving device is provided with connecting means for temporary releasable connection of a charging unit thereto.

20

According to a fifth aspect of the present invention, there is provided a method of wireless powering or recharging of a power-receiving device which comprises temporarily attaching the device to a charging unit, said method further comprising utilising a releasable temporary connecting means attached to the charging unit and/or the device, wherein said connecting means is adapted to enable the charging unit and the device to be attached in one or more positions and/or orientations relative to each other.

25

Accordingly, embodiments of the present invention provides a system for powering or recharging rechargeable devices which has several advantages over the prior art. Such a system is advantageous because it provides convenient retention of the device to the charging unit while still preserving the convenience of being able to simple

30

drop or press the device against the charging unit, thus greatly expanding the number of usable places for the user to locate the charging unit.

5 It is to be appreciated that embodiments of the present invention are distinguished over existing systems and methods in that there is provided a combination of wireless power transfer and a temporary releasable connection. Ordinary wired power transfer systems generally incorporate a releasable physical connection such as a plug and socket with physical mating means, but these are provided in order to secure a good electrical connection. Ordinary wireless power transfer systems, on
10 the other hand, do not incorporate physical, temporary releasable physical connections, since these have hitherto been seen as disadvantageous in a wireless system. For the avoidance of doubt, it is hereby stated that the expression "temporary releasable connection" is intended to cover connections that require a predetermined degree of force for separation. In other words, a simple location
15 spigot such as found in wireless electric toothbrush chargers is not intended to be covered by the term "temporary releasable connection", since no particular force is required to separate the toothbrush from the charger. Embodiments of the present invention therefore combine a releasable physical connection with a wireless power transfer system in a counterintuitive way that is not suggested by the prior art.

20

Preferably, the power receiving device is portable. Examples of portable power receiving devices include mobile telephones, lap-top computers, and personal digital assistants (PDA).

25 Examples of relative positions and/or orientations in which the charging unit and device may be attached include:

- Any position in one translational dimension.
- Any position in an orthogonal translational dimension.
- Any rotation about one plane.
- 30 • Any rotation about a plane orthogonal to the first.
- Any combination of the above.

It will be understood that the term "recharging" may also be taken to mean "powering" for devices which do not have substantial rechargeable batteries, and therefore can only operate while in proximity to the recharger, for example lightbulbs, fans etc.

5

Preferably, the charging unit is capable of charging multiple types of device.

Preferably, the charging unit is capable of charging multiple devices simultaneously.

10 Preferably, the device is capable of being charged by multiple types of charging unit.

Advantageously, the connecting means comprises a means added to the surface of the device and/or the charging unit. Examples of this type of connecting means include hook-and-eye fasteners (such as VelcroTM), suckers, reusable, self-adhesive
15 glue (as used in, for example, Post-ItTM notes) or high stiction/friction surfaces such as a rubbery or rough surface. The means may cover only a small portion of the surface, or for example a complete face, or the entire device and/or charging unit.

Alternatively or in addition, the connecting means may comprise a shaping of the
20 surface of the device and/or the charging unit. Examples of the connecting means used in this embodiment of the invention include bumps, ridges or grooves on the surface of either the charging unit or the device. For example, the connecting means may comprise a plurality of projections on one surface and a plurality of
25 corresponding holes on another surface, for example as used in Lego[®] building blocks. Alternatively, spiked systems such as those exemplified by Stickle-Bricks(R) or spikes with corresponding holes can be used as connecting means. Hook-and-eye shapings may also be used as connecting means.

Alternatively or in addition, the connecting means may comprise means added
30 beneath the surface of the device and/or the charging unit, said means being capable of acting at a distance. Examples of the connecting means in this embodiment of the

invention may include permanent magnets, and arrays of such, electromagnets, and arrays of such or possibly electrostatically-charged terminals.

Alternatively or in addition, only the charging unit, and not the device comprises a
5 connecting means. In this embodiment, examples of the connecting means include
pockets. For example, the charging unit may be positioned so that it hangs vertically
on a wall and the connecting means of the charging unit may be multiple pockets to
receive one or more devices. Further examples of the connecting means of the
10 charging unit may include elastic bands to strap down the device(s), or indentations
or contours on the charging unit. Examples of such indentations or contours on the
charging unit include a ridge designed to hold standard AA cells for example or a
bowl shape indentation to retain a variety of differently-shaped devices.

In one embodiment, the connecting means may be adapted to enable the charging
15 unit and the device to be mated in a large number of different relative orientations,
for example, such that the possible relative location and rotation of the device and
charging unit are quantised into so many possibilities that there is no limitation
visible to the user. For example, the connecting means could be Velcro®, which
would enable mating between the charging unit and the device to occur in almost any
20 position and rotation relative to each another. Alternatively, the connecting means
may be adapted to enable the charging unit and the device to be mated in a limited
number of relative orientations only. For example, the connecting means may
comprise a plurality of projections on one surface and a plurality of corresponding
holes on another surface, such as Lego® building blocks, which may only allow
25 mating between the charging unit and the device in a maximum of four possible
rotations and at a finite number of discrete locations).

In particular, there may only be one possible relative orientation in which the device
and charging unit may be mated together. For example, a manufacturer selling a
30 device capable of being recharged by relatively large recharging surfaces may
nevertheless choose to include with the device a small, low-cost recharging surface
which precisely fits the device, and is retained to it, for example by 4 holes in the

device and 4 corresponding bumps in the surface. Thus the user can "clip" the surface of the charging unit to the device in a manner similar to today's wired charging connections, but the device is capable of being used more flexibly with larger charging unit surfaces. In this case, the surface may be incorporated directly
5 into a mains-powered charging unit, providing a low-cost "no wires" easy-travel solution onto which a device can be conveniently pressed.

The connecting means of the device may correspond to the connecting means of the charging unit, such that devices will attach to charging units, but not devices to
10 devices nor charging units to charging units. An example of a connecting means of this embodiment is Velcro® which comes in "male" and "female" types which stick to each other but not to themselves. Thus, the connecting means of the device may be Velcro® of the male type, and the connecting means of the charging unit may be Velcro® of the female type.

15 Alternatively, the connecting means of the charging unit may be identical to the connecting means of the device. This embodiment will be capable of attaching to itself and may be used on all devices and charging units. An example is a reusable tacky adhesive such as the glue used in Post-It® notes. A potential advantage of this
20 is in the case where a device is capable of performing the function of a charging unit to another device.

In a yet further embodiment, there may be several different classes of pairs of types of connecting means, with each pair class attaching only to the other of the pair. A
25 potential advantage of this is in the case that not all charging units are capable of recharging all devices — a user can then immediately feel that a device is not "sticking" to a (or part of a) charging unit and will not be recharged by it.

In addition to the embodiments described above, the connecting means may in
30 addition possess aesthetic or visual qualities to conveniently inform users that a device is capable of being recharged, or a charging unit is available to recharge, or if

a certain (part of the) charging unit is more appropriate for charging a particular class of device in the manner described above.

Examples of these qualities include giving the connecting means:

- 5 • A specific reflective colour (e.g. Pantone® 123)
- A specific emissive colour (e.g. a bright red light)
- A fluorescent or luminous colour
- A specific "sheen" (e.g. glittering metallic silver)
- A specific repeated pattern (e.g. triangles)
- 10 • A specific logo design or text (e.g. "Zap™")
- An outline of the area in which a device may receive power
- A texture, which may optionally be recognisable by touch alone (e.g. fuzzy)
- A material

or combinations of the above.

15

These aesthetic qualities may even be used to inform users of the presence of devices or charging units in places where they would not otherwise suspect them, for example a charging unit embedded within part of a tabletop.

20

The aesthetic qualities may change their appearance or touch depending on the state of the device and/or the charging unit. For example the surface of a device and/or charging unit may change colour when it is powered-on, or the device is in need of recharging, or is recharging, or is recharged, or is in need of attention (for example a mobile phone device receiving an incoming call).

25

The preferred features of the invention are applicable to all aspects of the invention and may be used in any possible combination.

30

Throughout the description and claims of this specification, the words "comprise" and "contain" and variations of the words, for example "comprising" and "comprises", mean "including but not limited to", and are not intended to (and do not) exclude other components, integers, moieties, additives or steps.

For a better understanding of the present invention and to show it may be carried into effect, reference shall now be made, by way of example, to the accompanying drawings, in which:

5

FIGURE 1 shows an example of a prior art recharging connection;

FIGURE 2 shows an embodiment of the present invention; and

10 FIGURE 3 shows an alternative embodiment of the present invention.

Referring to Figure 3, there is shown a power receiving device 1, in this embodiment the device is a mobile phone. The mobile phone 1 has a connecting means 3 attached to the back of the phone. In this embodiment the connecting means 3 of the device 1
15 is a patch of self-adhesive Velcro® of the "male" type. This is black and slightly prickly, informing the user that the phone may be charged on a charging surface. Figure 3 also shows a charging unit 5. In this embodiment the charging unit 5 is an inductive recharging pad. On the surface 7 of the pad 5 is attached a patch of self-adhesive Velcro® of the "female" type 9, which acts as the connecting means of the
20 charging unit. This is black and slightly fuzzy, informing the user that the pad may charge devices.

To mate the phone 1 and the pad 5 temporarily, the user simply presses the phone 1 onto the pad 5 (or drops it, if the pad is below the phone) and the Velcro® 3, 9 holds
25 the phone in place on the pad. The phone can be placed onto the pad in any orientation and in any position, and is held securely by the Velcro®. Once the phone and the pad are attached in this way, the phone can receive power from the pad and so can be recharged. When the phone 1 has been recharged fully, or before if desired, it can be removed from the pad 5 easily by the user at any time, simply by pulling it
30 away. This disengages the Velcro® 3 from the Velcro® 9.

Figure 2 shows an alternative embodiment wherein a plurality of devices 1, (in this


embodiment, mobile phones) are attached to a charging unit 5 (in this embodiment, a pad). Figure 2 shows that, in this embodiment, the mobile phone 1 and the pad 5 can be mated at various different orientations to the each other and also the mobile phones can be positioned at different orientations relative to the other mobile phones

5 1.

P100354gb.spc

1/3

FIGURE 1

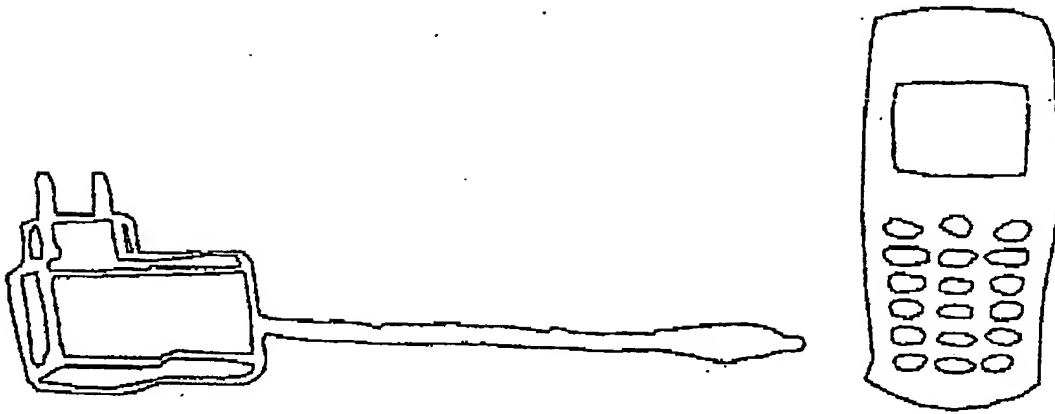

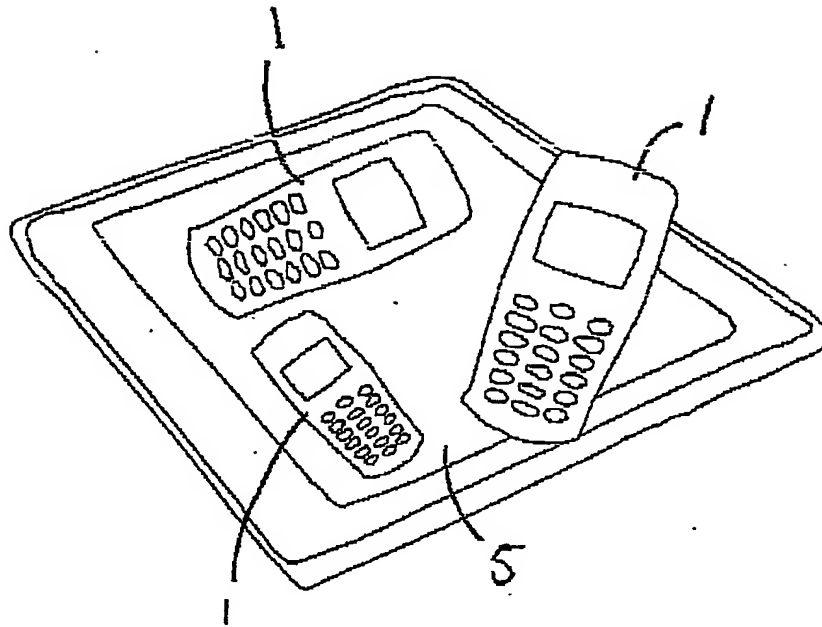


Figure 2 – Wirelessly-rechargeable devices, placed onto a recharging pad at any location and in any orientation.

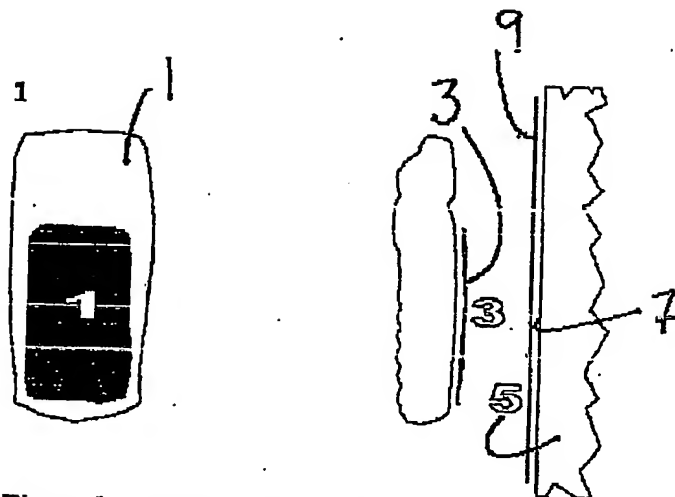


Figure 3 – Attachment of mating surface a) to back of device and b) to front of recharging pad

PCT Application

GB0304150

